



LFP

BSLBATT LFP

THE HEIGHT OF
PERFORMANCE



BSLBATT®

A New Era in Energy Storage

B-LFP48-100E 51.2V 100Ah

The LFP 51.2V 100Ah Energy Storage Systems are a family family of 51.2V battery module s and accessories. The 51.2V family is designed as a drop-in replacement for similar sized lead-acid batteries offering twice the run-time and nearly half the weight. The 51.2V series is designed for lower voltage, lower power and longer run-time applications. They are built with LFP Technology that offers outstanding intrinsic safety and excellent float and cycle life resulting in low cost of ownership.

Wisdom Power delivers safe lithium phosphate energy storage solutions in standard lead-acid battery sizes for a wide variety of applications.

Feature

- Eco-friendly
- Lithium iron phosphate battery(LiFePO4)
- Currently the safest lithium technology
- Excellent resistance to abuse
- Less than 3% self discharging
- Maintenance-free, modular, and lightweight
- Up to 60% weight saving
- Battery monitoring storage history
- Built in safety protection
- Quality guaranteed
- 10 Years Warranty
- 15-18 Years Designed service life



Application



Uninterrupted Power Supply



Marine application



Energy storage system



Floor sweeper



electric vehicle







communication system

Safe

BSLBATT® batteries are based on Lithium iron battery technology (LiFePO4). This is the safest Lithium technology available today. On top of that our bespoke casing and electronics further increase safety and durability.

Technology

BSLBATT's BATTERIES do not contain lead. LiFePO4 technology is an environmentally friendly way to store energy.

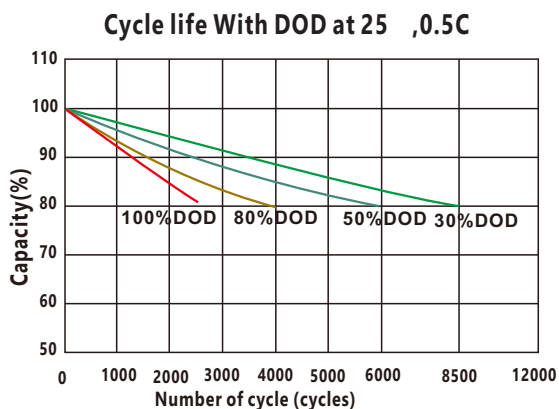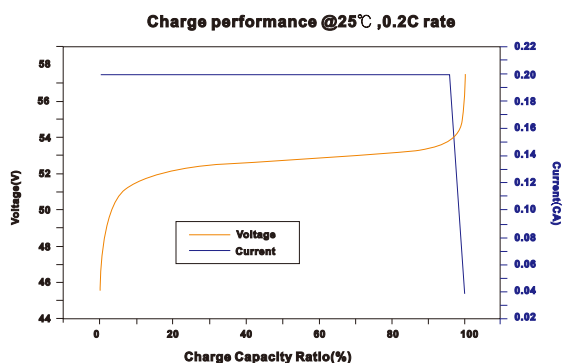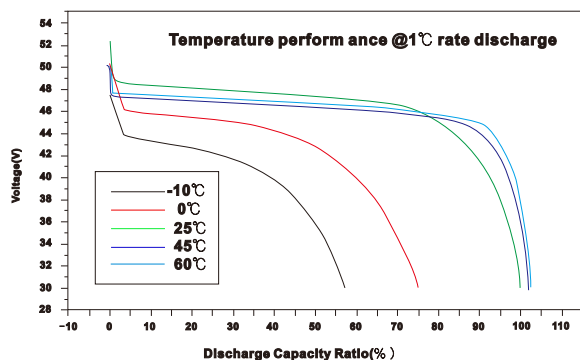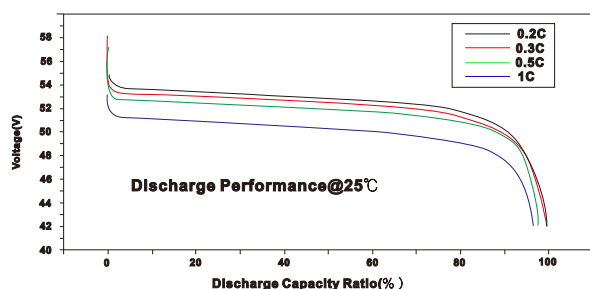

ELECTRICAL SPECIFICATIONS

Nominal Voltage	51.2V (16S)
Nominal Capacity	100 AH
Energy	5120 WH
Efficiency	99%
Self Discharge	<1% per Month

DISCHARGE SPECIFICATIONS

Max. Discharge Current	100AH
Max. Continuous Discharge Current	100A for 1 minute
Recommended Discharge Current	80A
Voltage at end of Discharge	47-48V

TEMPERATURE SPECIFICATIONS

Discharge Temperature	(-20 ~ 60°C)
Charge Temperature	(0 ~ 30°C)
Storage Temperature	(-5 ~ 32°C)

MECHANICAL SPECIFICATIONS

Dimensions (L x W x H)	442*520*177MM
Weight	45KG
Case Material	Steel
Cell Type	Prismatic
Chemistry	LiFePO4

CHARGE SPECIFICATIONS

Recommended Charge Current	30A
Maximum Charge Current	50A
Recommended Charge Voltage	54-55V

COMPLIANCE SPECIFICATIONS

Certifications	CE (battery)
	UN38.3 (battery)
	ROHS2.0 (cells)
Shipping Classification	UN 3480, CLASS 9

www.lithium-battery-factory.com



When it comes to reliability, our lithium batteries won't let you down. Contact your local distributor, visit www.lithium-battery-factory.com or talk to one of our Certified Wisdom Power.

Call International Calls: 0086 0752 2819469

Certifications Applicable to the Design and Manufacture of Lithium Iron Phosphate Batteries

